


Inlet and Outlet threads are 1/4" BSP(P). McDantim can supply 1/4" or 3/8" hose barbs pre-installed. We also have 1/4" BSPP x 1/4" NPT-F adapters that can be pre-installed.

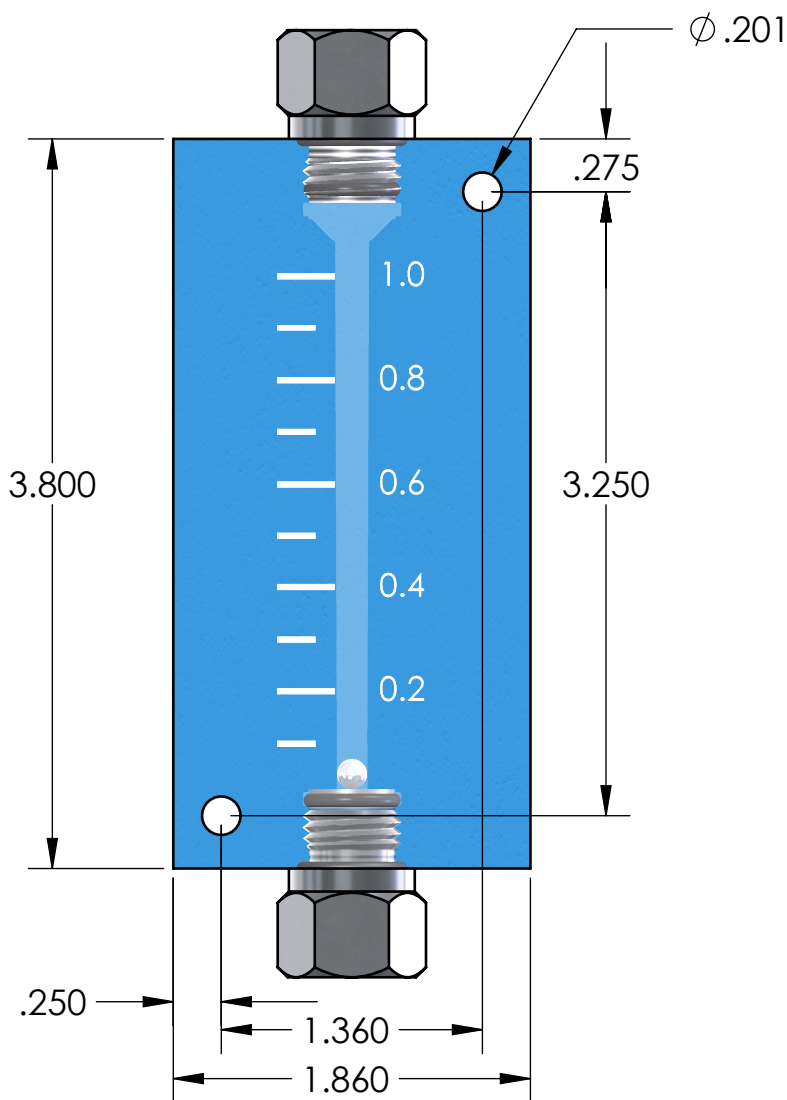

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MCDANTIM INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MCDANTIM INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/32$
ANGULAR: MACH \pm BEND \pm
TWO PLACE DECIMAL $\pm .01$
THREE PLACE DECIMAL $\pm .005$

MATERIAL

FINISH

NEXT ASSY

USED ON

APPLICATION

DO NOT SCALE DRAWING

DRAWN

NAME

TRA

DATE

6/7/18

CHECKED

ENG APPR.

MFG APPR.

Q.A.

COMMENTS:



Single In-Line Leak Indicator

SIZE DWG. NO.

A

MV039 Dimensions

REV.

0

SCALE: 1:1

WEIGHT:

SHEET 1 OF 1